


DIESEL ENGINES AIR-COOLED

MADE TOUGH FOR AFRICA™

ISO 3001 CERTIFIED
HALF SPEED REDUCTION -
AVAILABLE ON ALL SIZES

FULL RANGE OF REPLACEMENT PARTS | LIGHT-WEIGHT AND COMPACT

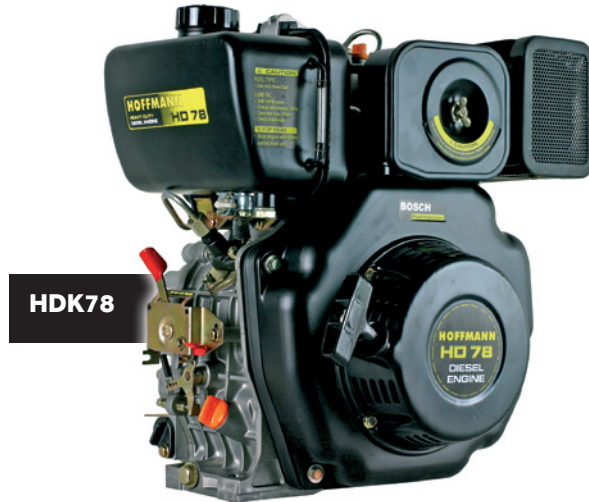

HDK78



HDK92

- High performance
- Heavy-duty recoil starter with special auto-return decompressor for easy and fast starting
- Balancer shafts fitted
- Electric start
- Self-bleeding system
- Compact, light-weight and superb quality
- Easy maintenance and wide application
- Low fuel consumption, less noise and lower emissions

Applications: Do your own builds - pumps, gensets, welders, builder's equipment, high pressure washers, lawnmowers, conveyors, hammer mills and many more.

HOFFMANN POWER

ENGINE DRAWINGS AVAILABLE ON www.hoffmannpower.co.za

MODEL	HDK70	HDK78	HDK86	HDK92	HDK95
Engine type	Single-cylinder, 4-stroke, air-cooled, diesel				
Combustion system	Direct injection				
Displacement (cc)	211	296	418	462	532
Max engine speed (rpm)	3000/3600				
Max output kW (hp)	3.1 (4.2)	4.4 (6.0)	7.1 (9.6)	7.5 (10)	-
Continuous output kW (hp)	2.8 (3.8)	4.0 (5.5)	6.3 (8.6)	6.7 (8.9)	-
Starting method	Recoil/Electric				
Bore x stroke (mm)	70 x 57	78 x 64	86 x 72	88 x 76	95x75
Output shaft size standard (mm)	19.05		25.4		30
Output shaft size half speed 2:1 (mm)	19.05	25.4	30	-	-
Lube oil type	SAE 40 diesel engine oil				
Fuel tank capacity (L)	2.5	3.5	5.5	4.7	5.5
Fuel consumption (L p/h)	0.55	0.78	1.19	1.38	1.8
Lube oil capacity (L)	0.8	1.1	1.65	1.6	1.65
Nett weight (kg)	27	33	54	50	57
Dimensions	332 x 392 x 416	383 x 421 x 450	417 x 470 x 494	417 x 441 x 494	

We reserve the right to improve or withdraw the specifications or products without prior notice