


COMPLETE FIRE FIGHTING UNITS

ISO 9001 CERTIFIED


MADE TOUGH FOR AFRICA™

FULL RANGE OF REPLACEMENT PARTS | LIGHT-WEIGHT AND COMPACT

WITH AIR-COOLED PETROL ENGINE

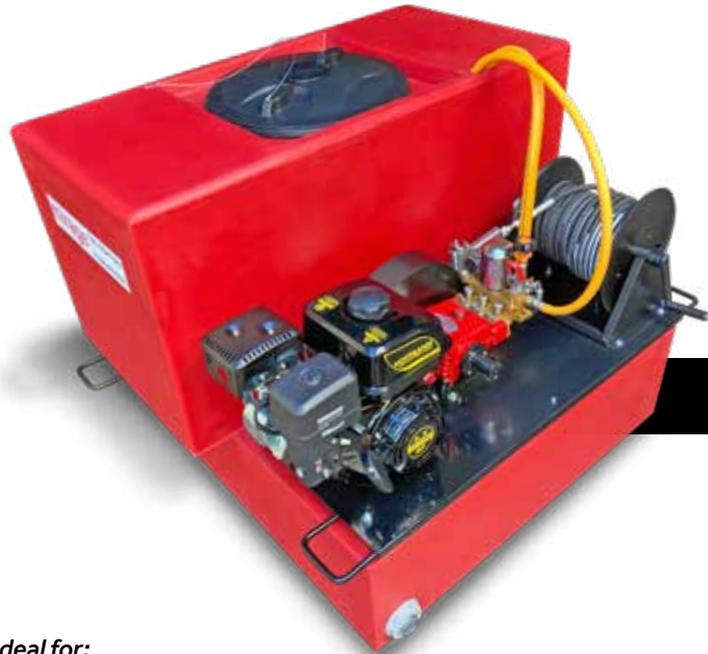

FF-6H22/HL22

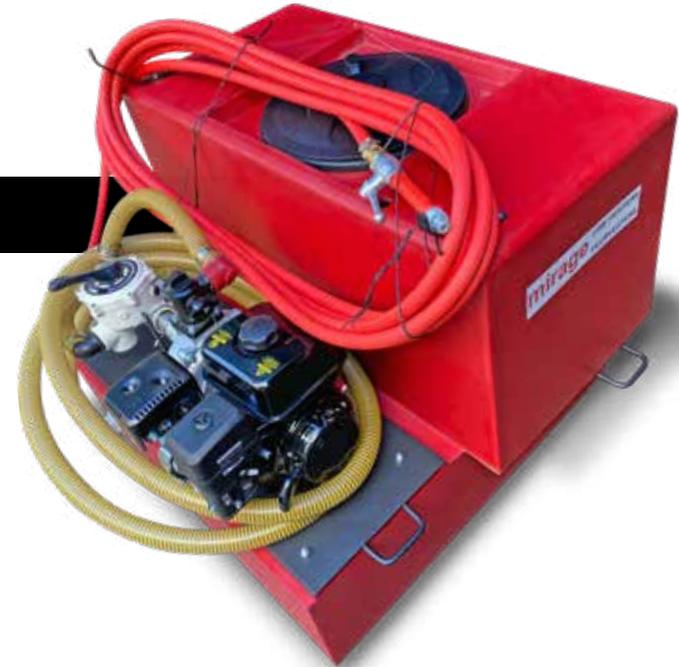

FF-HX50HP-2

Ideal for:

- to put out grass fires
- keeps ground moist after grass fire
- creating fire breaks

HOFFMANN POWER

ENGINE DRAWINGS AVAILABLE ON www.hoffmannpower.co.za

MODEL	FF-6H22/HL22	FF-HX50HP-2
Engine	HOFFMANN HX6.5 Petrol Engine (6.5 HP)	
Water tank	600l stepped tank with carry handles	600l stepped tank with carry handles
Hose	20 metres x 3/8" hydraulic hose on reel	15m red fire hose - 20mm diameter
Gun	Adjustable nozzle pistol grip gun	Adjustable spray gun/branch pipe
Mounting	Steel base with rubber mounts and belt guard	Steel base with rubber mounts
Pressure	High-pressure unit. 35 bar maximum	Medium-pressure unit. 6.2 bar maximum
Pressure valve	Manual pressure relief valve	
Pump type	Piston Pulley	2 Stage medium pressure
Pump	25 litres per minute	Up to 133 litres per minute
Spray distance	10 to 12 metres	10 - 12 metres
Suction	With venturi kit and 3m hose	-
Application	Fits most single or double cab bakkies	

We reserve the right to improve or withdraw the specifications or products without prior notice